

SL-T4232IRC050-L380-C

Absolute Maximum Ratings at Ta=25

1. Storage and operation instructions:

2. Peak Forward Current:



Electrical Optical Characteristics at Ta=25

Note:

Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

Fig.1 Spectral Distribution

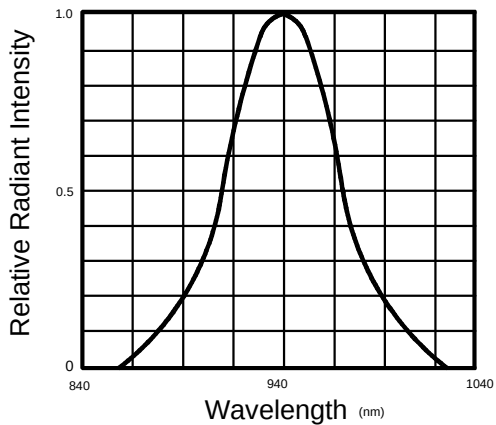


Fig.2 Forward Current Vs Ambient Temperature

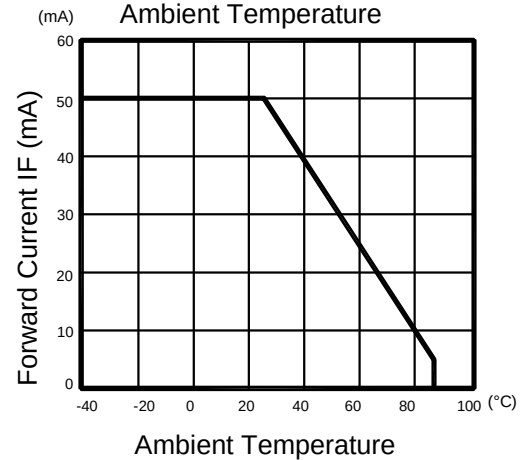


Fig.3 Forward Current Vs Forward Voltage

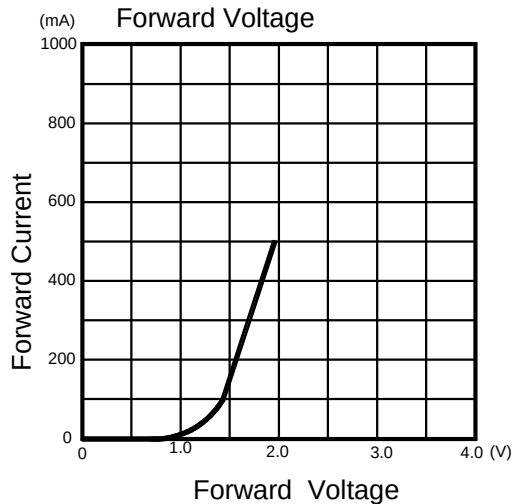


Fig.4 Relative Radiant Intensity Vs Ambient Temperature

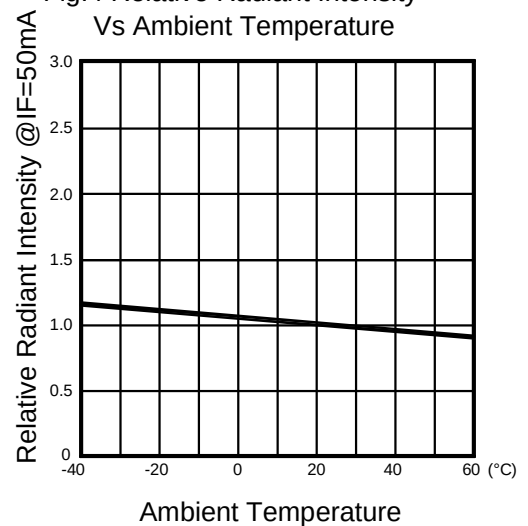


Fig.5 Relative Radiant Intensity Vs Forward Current


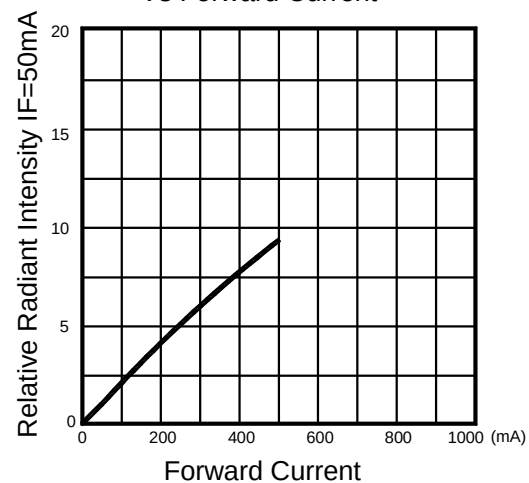


Fig.6 Radiation Diagram

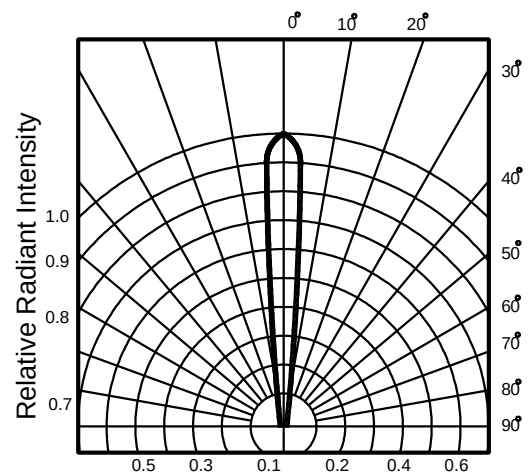

	110	130
	130	155
	155	185
	185	220
	220	260

NOTE

LIGHT

Light Electronics CO., LTD.

MODEL NAME:

QUANTITY:

BIN:

PACKING DATE:

REMARKS:

LOT NO.:

LIGHT

Light Electronics CO., LTD.

MODEL NAME:




QUANTITY:

BIN:

PACKING DATE:

CUSTOMER P/N:

LOT NO.:

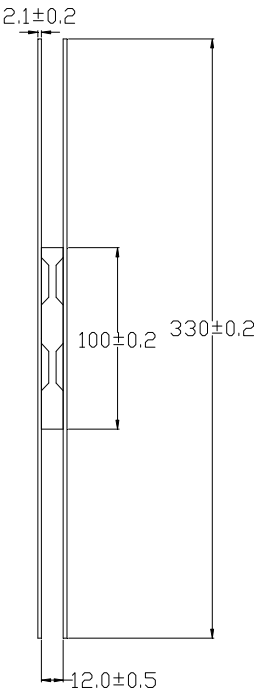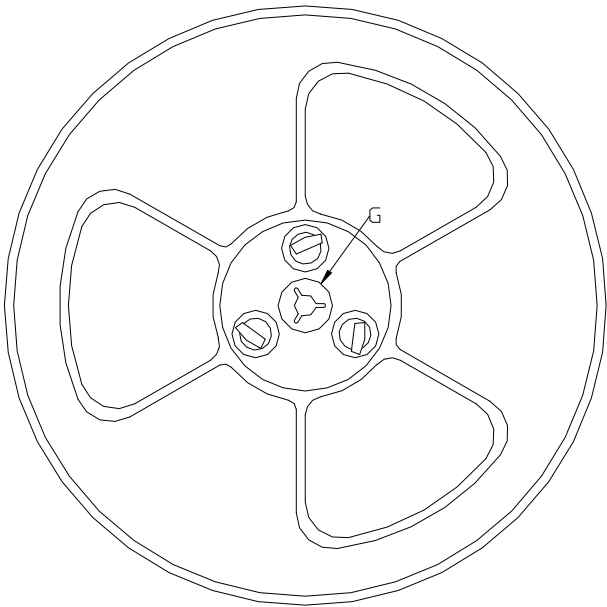

G 区放大图

Note:

