


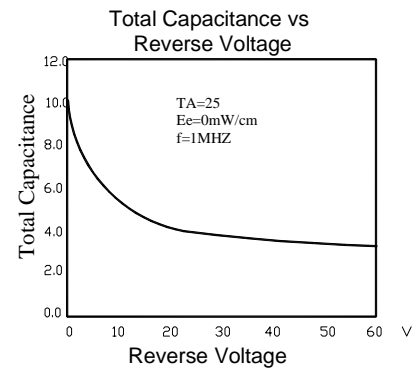

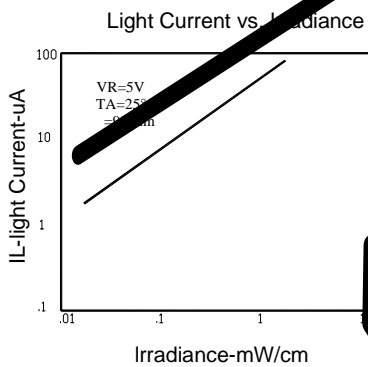
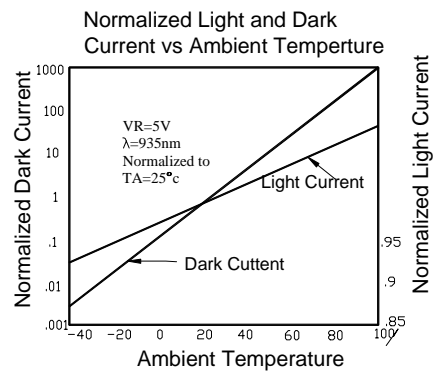


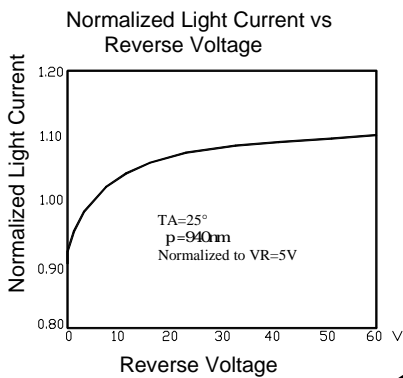


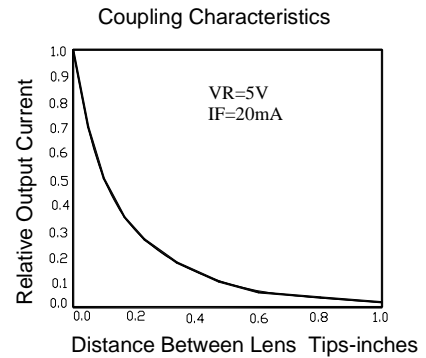


## Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

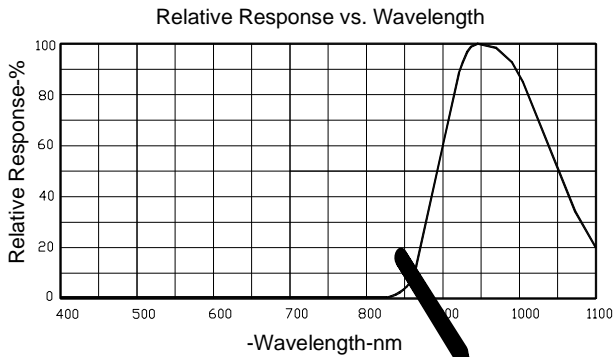

**Sensitivity Diagram**

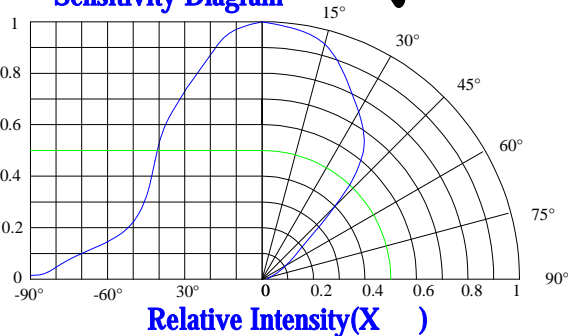

**Sensitivity Diagram**

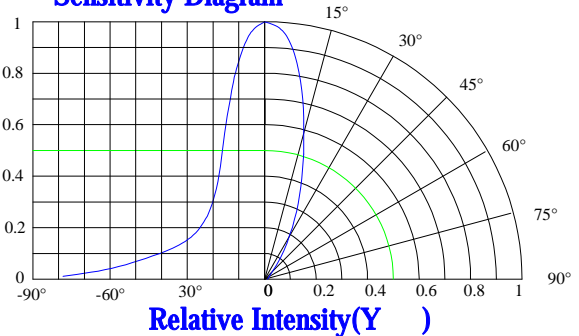

## Infrared Photo Diode Specification

-

## Label Explanation

LIGHT Universal Label

Customer Defined Label

LIGHT

RoHS



## Carrier Tape Specifications (Loaded Quantity: 2300pcs/reel)

| ITEM | W              | A0             | A1             | B0             | B1             | K0             | E              | F              | D0             | D1             | P0             | P1             | P2             | T              |
|------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| DI M | 12.00          | 4.35           | 2.05           | 4.40           | 4.10           | 3.65           | 1.75           | 5.50           | 1.50           | 1.60           | 4.00           | 8.00           | 2.00           | 0.30           |
| TOL  | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.10<br>-0.10 | +0.05<br>-0.05 |

