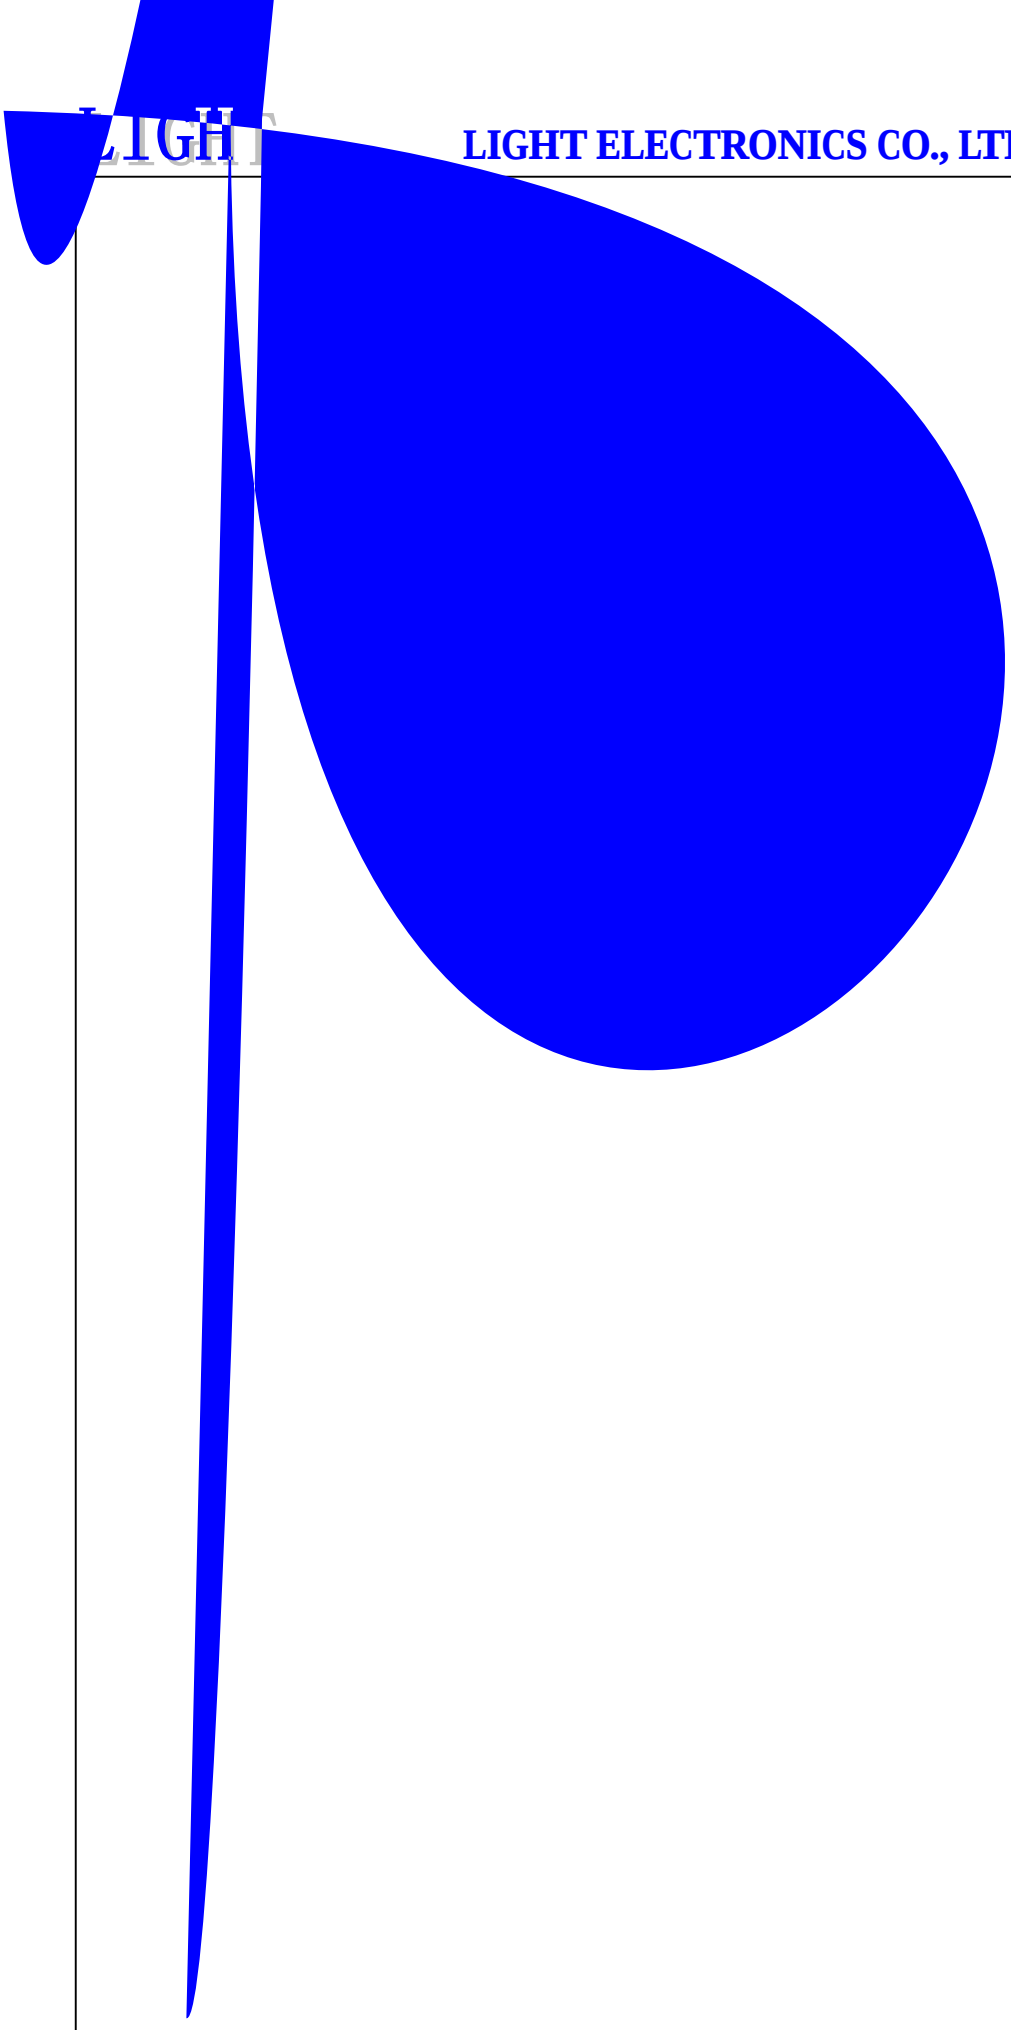

Infrared Photo Diode Specification

Commodity: Infrared Photo diode

Reverse Light Current Bin Limits

BIN CODE	Min.(μA)	Max.(μA)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added ±15% tolerance.

Label Explanation

LIGHT Universal Label

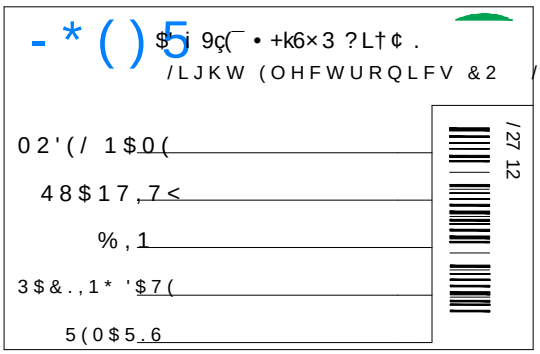

Customer Defined Label

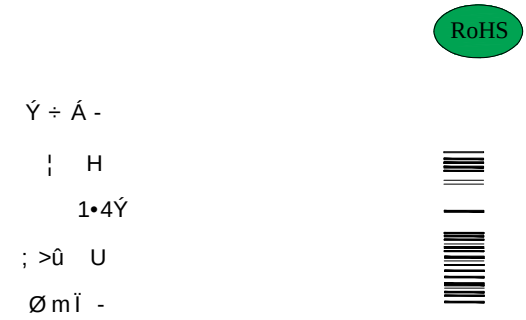

Carrier Tape Specifications (Loaded Quantity: 2200pcs/reel)

Note: Tolerance unless mentioned is ±0.1mm; Unit = mm
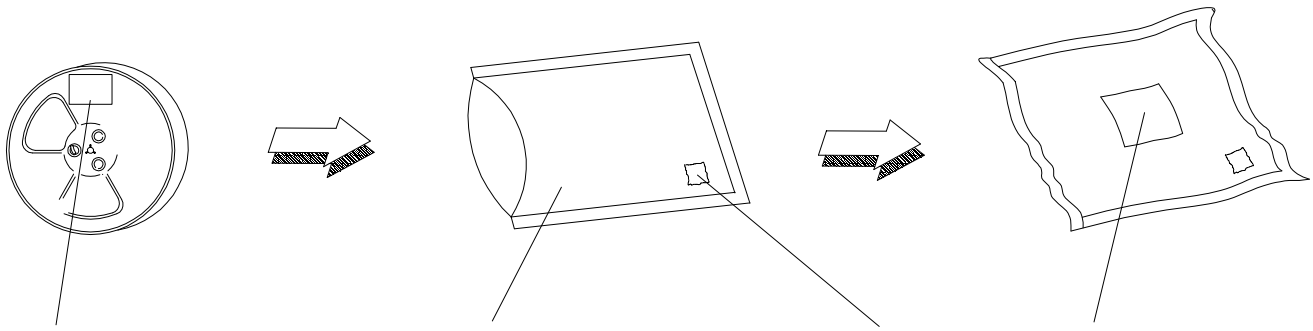
Moisture Resistant Packaging